

Using/Configuring Autodrive

Before reading this article, we recommend reading the [Paths & Signals](#) tutorial.

Preparations:

1. Configure a path on one of your signals (keep in mind that you need atleast 2 consecutive signals - ideally a "signal block" - in order for this tutorial to work). Remember the name of this path.
2. Place a locomotive infront of the signal with the configured path
3. Enter the locomotive and set it up to go forward (*but don't accelerate!*)
4. Enter the chat and type the following command:

Command:	Function:
<code>/setdest <pathname></code>	Makes the train follow a specific user-preconfigured signal path. <pathname> must be replaced by your paths name!

The trains main display (by default the center display) should now start displaying upcoming/current speed limits and/or upcoming track events (stops, signals, etc.).


Activating Autodrive:

- Enter the settings menu of the center/right cab screen. Press on the **red** button.



- Navigate to the **Autodrive (or ATO)** setting using the **up-/down arrow** buttons.
- Click on **enter** (the button with the checkmark)

There should now be a **green checkmark** behind "Autodrive" signalling that it is now active. The train should now start moving on its own until it cannot follow any more paths.

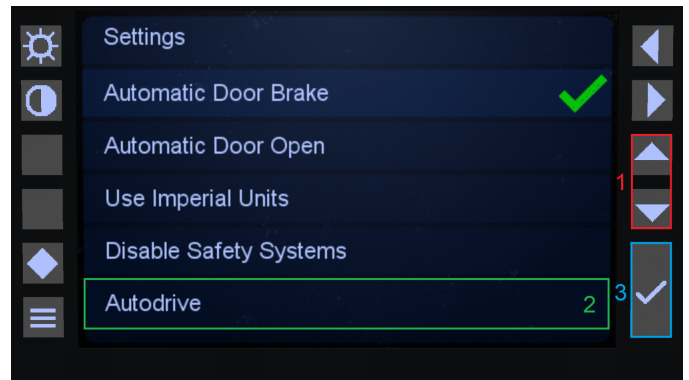

You can easily spot trains which have autodrive active through the villager in their cabs.

Revision #9

Created 2025-07-29 21:09:59 CEST by Ld44hbxhkh (Wiki Admin)

Updated 2026-07-13 18:52:44 CEST by Ld44hbxhkh (Wiki Admin)